


ASTM CATEGORY 1 : road only  
Recommended weight limit : 120kg

## REFERENCES WHEELS

R57301 CosmicUlti16Rr

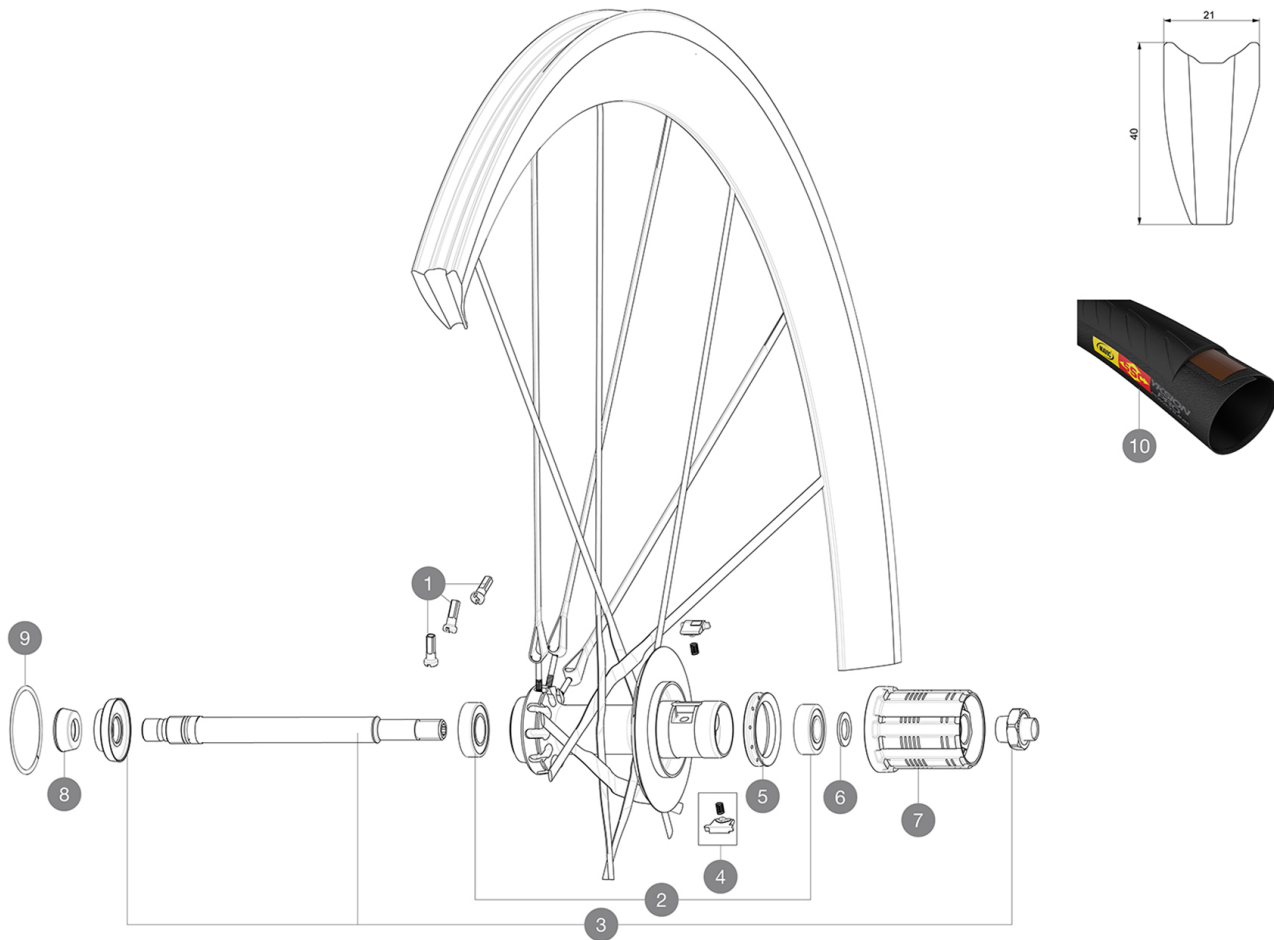

### SPOKES

1 99603601 KIT 10 NIPPLES COSMIC CARBON ULTIMATE

### HUB SHELLS

2 33000001 REAR HUB B9+6901 BEARINGS 2013  
3 V2250801 KIT REAR AXLE COSMIC ULTIMATE  
4 M40578 FTSL PAWLS KIT (ROAD WHEELS)  
5 99500001 FTSL/FTSX FREEHUB BODY SEAL  
6 30872801 SET OF 3 INTERNAL SILVER SPACERS 9mm FTSL  
7 30871101 FTSL-L ROAD FREEWHEEL BODY HG11 8/9 compatible  
7 30871201 FTSL-L ROAD FREEWHEEL BODY ED11 8/9 compatible  
9 99604501 SET OF 2 R.HUB RING COS.CARB.ULTIMATE

### TYRES

10 37804625 Yksion ProPowerTub SSC

### ADAPTERS

8 35117301 FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T

**MAVIC** *Cosmic Ultimate***DELIVERED WITH**

BR601 Titanium quick releases	
Carbon brake pads	
Multifonction adjustment wrench	
User guide	

**Specifications****RIMS**

- **Material** : 100% woven 12K carbon fiber
- **Height** : 40 mm
- **Drilling** : no holes, spokes molded to the rim
- **Brake track** : carbon with TgMAX technology
- **Valve hole diameter** : 6.5 mm
- **Tyre** : tubular
- **ETRTO size** : 28" tubular
- **Recommended tyre sizes** : 21 to 28 mm

**SPOKES**

- **Material** : unidirectional carbon fiber
- **Shape** : R2R
- **Nipples** : brass, ABS
- **Count** : 20 front and rear
- **Lacing** : crossed 2 front and rear drive side, radial non drive side

**WHEEL HUB**

- **Front body** : Front 100% carbon
  - **Rear body** : aluminum
  - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : FTS-L steel

**WHEEL WEIGHTS**

Wheel weight 665