MAVIC Ksyrium Pro Carbon SL C HR

ASTM CATEGORY 1 : road only
Recommended weight limit : 120kg
Recommended tire sizes: 25 to 32 mm
Max. Pressure: 25mm 7.7 bars - 110 PSI

REFERENCES WHEELS

R98701	KsyProCarbSLC HR Rr SV

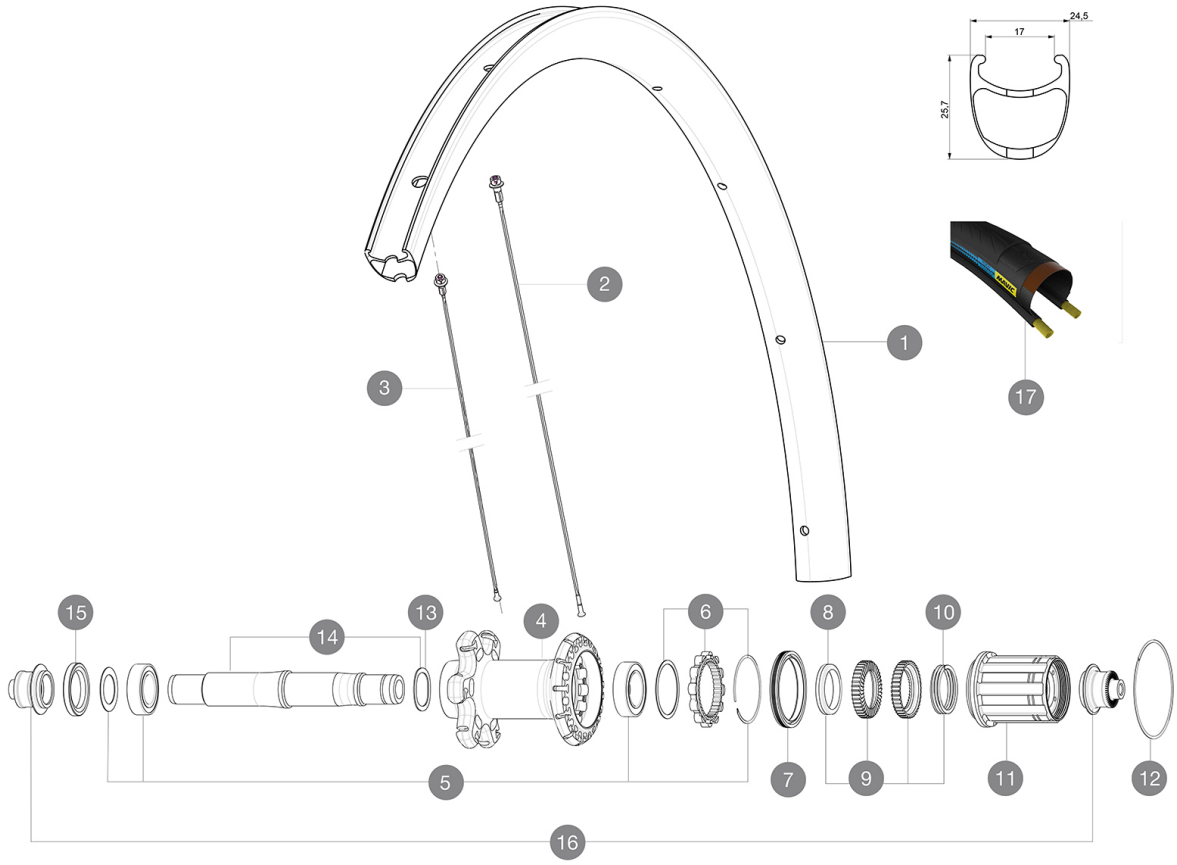

RIMS

VALVE HOLE Ã⍰ (MM): 6,5 :

1	V2409513	KIT RR RIM KSYRIUM PRO CARBON SL Clinch HR - while stock las
1	V2737513	KIT REAR RIM KSYRIUM PRO CARBON SL UST
	V3720101	25mm UST Tape for 19 to 22mm Road Rims
	V2690101	KIT CARBON RIM TAPE 21x622mm - FOR CARBON RIM

SPOKES

2	V2271401	KIT 12 DS KSYRIUM PRO CARB SL T SPOKE 273mm - while stock la
2	V3663201	KIT 12 DS KSY PRO CARB SL UST/UST Disc/C Disc/T Disc BUTTED
3	V3663301	KIT 12 FRT KSYR PRO CARB SL UST Disc + NDS KSYR PRO CARB SL
3	V2273101	KIT 1 FT 285/1 FT 291/1 DS 273 KSY PRO CARB SL C/D/T HR SPK
3	V2271501	KIT 12 FT KSY PRO CARB SL D/NDS KSY PRO CARB SL SPK 291mm -

HUB SHELLS

4	N/A	HUB BODY
5	V2540301	KIT REAR BEARINGS 17x28x7 + 15x26x7 CERAMIC - while stock la
5	V2560101	KIT ID360 BEARINGS 15/26/7 + 17/28/7
6	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
7	V2251601	KIT ID360 SEAL + GREASE
8	V2500501	KIT ID360 3 PADS NOISE REDUCING
9	V2251701	KIT ID360 2 RATCHETS + SPRING + GREASE
10	V2251801	KIT 3 ID360 ROAD SPRINGS
11	V3430101	HG11 Freewheel Body ID360
12	V2252201	KIT 2 REAR HUB RETENTION RINGS 48mm
13	V2251501	KIT 3 ID360 WAVE WASHERS
14	V2251201	KIT ID360 AXLE UB
15	V2251001	KIT ID360 HUB THREADED CAP UB+DISC 6 BOLTS (large) - while s

TYRES

17	39436025	YksionProPowerLink HR

ADAPTERS

16	B4989401	ADAPTER Rr 9mm QR ID360 (6bolt)

Download date: 2024-07-16 / Update date: 2022-03-01

Ksyrium Pro Carbon SL C HR

2017
REAR

DELIVERED WITH

BR601 quick releases (V24 501 01 frt, V24 502 01 rear) 1	
Carbon brake pads (V24 603 01 Shimano/Sram, V24 604 01 Campagnolo) 1 pair	
Rim tape	
Multifonction adjustment wrench (325 423 01) 1	
"Haute Route" special edition wheelbags 1	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body	
Front axle: Quick Release only	
Rear axle: Quick Release only	

Specifications

RIMS

- **Material :** 3K carbon fibers
- **Height :** 25mm
- **Drilling :** traditional
- **Brake track :** carbon with TgMAX technology
- **Brake track :** carbon
- **Valve hole diameter :** 6.5 mm
- **Tire :** clincher
- **Internal width :** 17 mm
- **ETRTO size :** 622x17C

SPOKES

- **Material :** steel
- **Shape :** straight pull, bladed, double butted
- **Nipples :** aluminum, ABS
- **Count :** front 18, rear 24
- **Lacing :** front radial, rear Isopulse

WHEEL HUB

- **Front and rear bodies :** aluminum
- **Axle material :** aluminum

High quality ceramic bearings by CeramicSpeed (R)

- **Freewheel :** Instant Drive 360

VERSIONS

- **Color :** Black only

WHEEL WEIGHTS

Wheel weight 775

Download date: 2024-07-16 / Update date: 2022-03-01