


REFERENCES WHEELS

354034	CROSSONE 26 FRT
--------	-----------------



RIMS

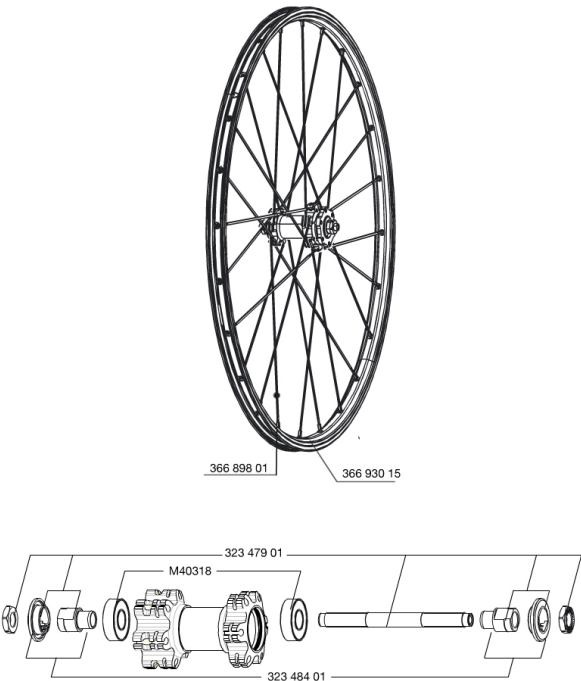

&NBSP;;

1	36693015	"KIT FRONT/REAR CROSSONE 26"" RIM"
---	----------	------------------------------------

SPOKES

2	36689801	KIT 12 FT/NDS CROSSONE SPK 264mm
---	----------	----------------------------------

HUB SHELLS

4	M40318	KIT 2 HUB BEARINGS 6001
5	32347901	FRONT AXLE QRM UB
6	32348401	EXPANSIBLE BEARINGS SUPPORT

DELIVERED WITH

BR101 quick releases	
Rim tape	
Valve reducer	
User guide	

Specifications

RIMS

- **Material** : 6106 Aluminum
 - **Joint** : pinned
 - **Drilling** : traditional
- Disc brake specific profile
- **Valve hole diameter** : 8,5 mm with pop off reducer
 - **Tyre** : tubetype
 - **Internal width** : 19 mm
 - **ETRTO size 26"** : 559x19C
 - **ETRTO size 650b/27.5"** : 584x19c
 - **ETRTO size 29"** : 622x19C
 - **Recommended tyre sizes** : 1.5 to 2.3

SPOKES

- **Material** : steel
- **Shape** : straight pull, round
- **Nipples** : brass, ABS
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Body** : aluminum
 - **Front and rear bodies** : aluminum
 - **Axle material** : steel
- Sealed cartridge bearings
- **Freewheel** : FTS-X steel

WHEEL WEIGHTS

Wheel weight

Weight Front 26": 850

Weight Front 27.5": 905

Weight Front 29": 950