

MAVIC E-XA Elite 27+

ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 60mm to 81mm (2.5" to 3.2")

REFERENCES WHEELS

R22581 E-Xa Elite 27+ Rr Bst XD

R20871 E-Xa Elite 27+ Bst Rr NT

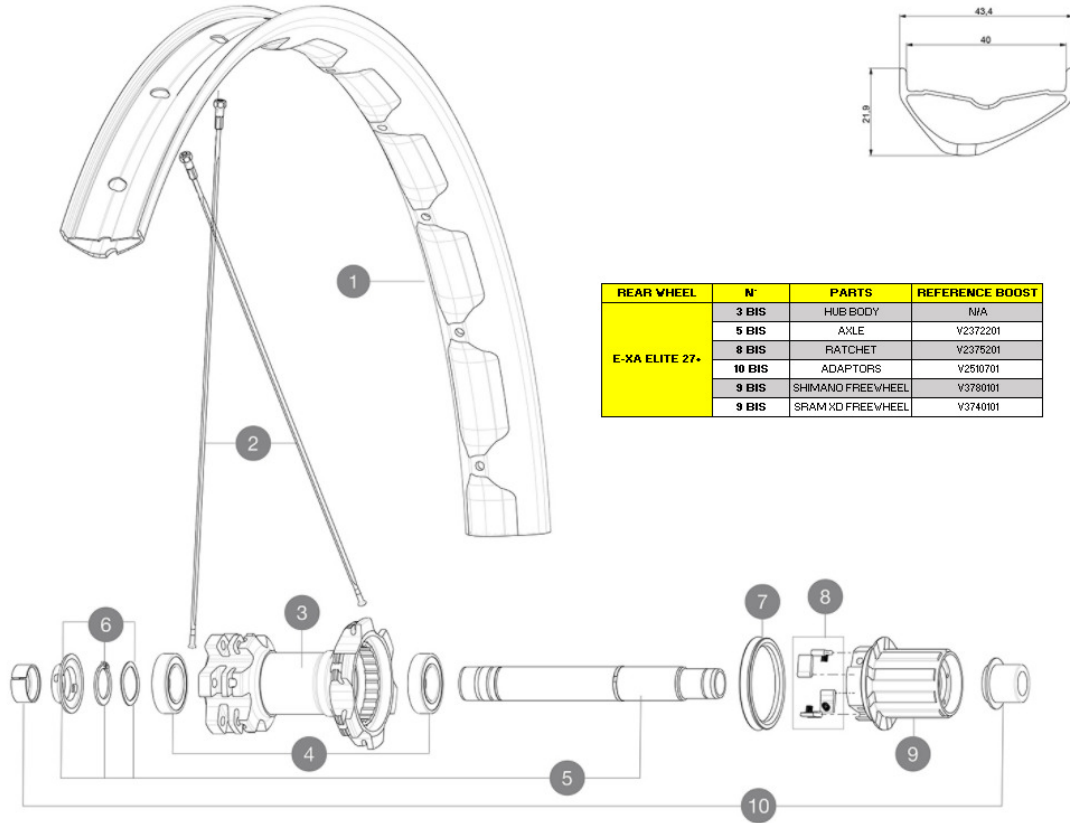

| REAR WHEEL | N° | PARTS | REFERENCE BOOST |
|----------------|--------|-------------------|-----------------|
| E-XA ELITE 27+ | 3 BIS | HUB BODY | N/A |
| | 5 BIS | AXLE | V2372201 |
| | 8 BIS | RATCHET | V2375201 |
| | 10 BIS | ADAPTORS | V2510701 |
| | 9 BIS | SHIMANO FREEWHEEL | V3780101 |
| | 9 BIS | SRAM XD FREEWHEEL | V3740101 |

RIMS

&NBSP;:

| | | |
|---|----------------------|---|
| 1 | V2319115 V3700101 | KIT FRONT/REAR RIM E-XA/XA ELITE 27,5" + 40 TSS 43mm UST Tape For 40mm Wide Rims |
|---|----------------------|---|

SPOKES

| | | |
|---|----------|--|
| 2 | V2386201 | KIT 12 FRT/REAR E-XA/XA ELITE 27,5" BLACK NIPPLES - while s |
| 2 | V3666501 | KIT 12 FRT/NDS AKSIUM ELITE UST Disc 650B FLAT SPOKE 277mm + |

HUB SHELLS

| | | |
|---|----------|--|
| 3 | N/A | HUB BODY |
| | N/A | HUB BODY |
| 4 | M40076 | HUB BEARINGS 17x30x7 6903 x 2 |
| 5 | V2371601 | KIT AXLE 148mm ITS4 QRM AUTO |
| | V2372201 | KIT ID360 148 D6T AXLE WITH CLIP |
| 6 | V2373001 | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing |
| 7 | 99610701 | ITS-4 FREEWHEEL SEAL |
| 8 | 99610601 | PAWLS KIT FOR ITS-4 (OR TS-2) |
| | V2375201 | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 9 | V3610101 | HG MTB FREEWHEEL BODY ITS4 QRM AUTO |
| | V3740101 | XD MTB Freewheel Body ID360 |
| | V3780101 | HG9 Alloy MTB Freewheel Body ID360 |

ADAPTERS

| | | |
|----|----------|------------------------------|
| 10 | V2510701 | ID360V2RrAxleAdapt12x142/148 |
| | V2510801 | ID360 V2 RrAxleAdapt9x135 |

MAVIC *E-XA Elite 27+***DELIVERED WITH**

| | |
|---|--|
| UST valve and accessories (129 838 01) | |
| Tubeless rim tape | |
| User guide | |

COMPATIBILITY

| | |
|-------------------------------|--|
| Freewheel: Shimano/Sram or XD | |
|-------------------------------|--|

Specifications**RIMS**

- **Material** : S6000 Aluminum
 - **Joint** : SUP
 - **Drilling** : traditional
 - **Weight reduction** : ISM
 - **Valve hole diameter** : 6.5 mm
 - **Tyre** : UST Tubeless and tubetype
 - **Internal width** : 40 mm
 - **ETRTO size 27.5"** : 584x25TSS
- Use with Mavic Tubeless Tape

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Front and rear bodies** : aluminum
 - **Axle material** : aluminum
- Auto adjust sealed cartridge bearings (QRM Auto)
- **Freewheel** : ITS-4 QRM Auto alloy

VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost only (front 110, rear 148)

WHEEL WEIGHTS

1055