



ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included
Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI

REFERENCES WHEELS

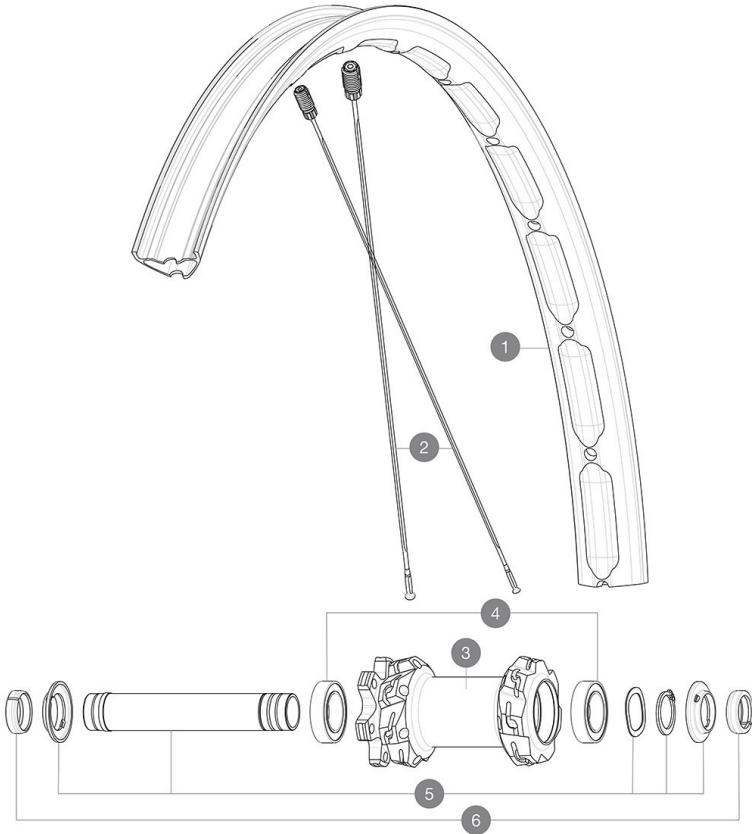

Specifications	Maxi target
Frontal run out	0,5mm
Lateral run out	0,5mm
Centrering	1,0mm (2x0,5)
Tension daN	81 > 107
Disc side	

RIMS



&NBSP;:

- 1

V00094631

Kit Front/Rear rim Deemax Enduro SL 29"

OPTIONS

- 99694101

ADAPTER Ft 15 to 9mm QR

ADAPTERS

- 6

V2372501

15mm MTB Axle Cap QRM Auto From 2019

SPOKES

- 2

V00095231

Kit 14 steel spokes 305mm Deemax Enduro SL 29"

HUB SHELLS

- 3

N/A

HUB BODY
- 4

V2500901

KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
- 5

V2372401

KIT 110mm AXLE QRM AUTO MTB > 2019



DEEMAX ENDURO SL 29

DELIVERED WITH

UST valve and accessories (129 838 01)	
Multifonction adjustment wrench (delivered with rear wheel) (325 423 01)	
User guide	
2 replacement spokes with each wheel	

COMPATIBILITY

Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)	
ID360 Shimano / Sram freewheel body ([V3430101] - Delivered on the wheel)	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	

Specifications

RIMS

- **Material** : Mxstal
 - **Height** : 22 mm
 - **Joint** : SUP welding technology
 - **Internal width** : 30 mm
 - **Drilling** : Fore tapeless tubeless technology (front/rear 28 holes)
- Disc brake specific profile
Asymmetrical rim design
- **ETRTO size 29"** : 622x30TC
 - **Tire** : UST Tubeless and tubetype

SPOKES

- **Material** : steel
- **Shape** : j-bent, round, 2.0 straight gauge

WHEEL HUB

- **Body** : aluminum
 - **Body design** : INFINITY
 - **Disc standard** : 6 Bolts only
 - **Axle material** : aluminum
- Hub available with 6-bolt or Center Lock® brake rotors
- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
 - **Freewheel** : Shimano HG MTB / Shimano MS / Sram XD MTB
 - **Freewheel** : FTS-L steel

WHEEL WEIGHTS

905