


REFERENCES WHEELS

354011 CROSSROC 26 REAR 9x135WTS



RIMS

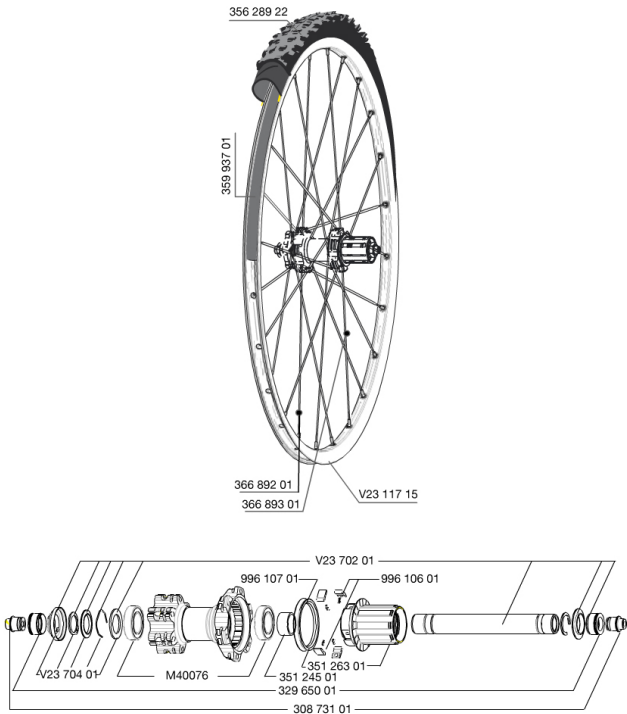

&NBSP;:

V2311715	KIT FRONT/REAR CROSSROC 27,5"
35993701	UST RIM STRIP 27.5x19c

SPOKES

36689201	"KIT 12 FT/NDS CROSSROC 27,5"" SPK 277mm"
36689301	"KIT 12 DS CROSSROC/XRIDE UST/XMAX ELITE/XA ELITE 27,5"" SPK

HUB SHELLS

V2370401	KIT REAR AUTO ADJUSTING PLAY 12mm AXLE
35124501	SET OF 3 REAR AXLE/FREEWHEEL BODY SPACERS MTB L1
99610701	ITS-4 FREEWHEEL SEAL
V2370201	KIT REAR AXLE 12MM CROSSONE/CROSSRIDE/CROSSROC
35126301	TS-2 FREEWHEEL BODY + SEAL 2013 (NO PAWLS) - while stock las
99610601	PAWLS KIT FOR ITS-4 (OR TS-2)

TYRES

35628922	Crossroc Roam 650b
----------	--------------------

ADAPTERS

32965001	ADAPTER Rr 12x142mm Elite/CRide MTB (Rd)
30873101	2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB

MAVIC Crossroc WTS

DELIVERED WITH

BR101 rear quick release	
Rim tape	
Tubeless rim tape	
UST valve and accessories	
Rear QR adapters	
Valve reducer	
User guide	

Specifications

RIMS

- **Material** : 6106 Aluminum
- **Joint** : pinned
- **Drilling** : traditional with H2 reinforcement
Disc brake specific profile
- **Valve hole diameter** : 8,5 mm with pop off reducer
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 19 mm
- **ETRTO size 26"** : 559x19C
- **ETRTO size 650b/27.5"** : 584x19c
- **ETRTO size 29"** : 622x19C
- **Recommended tyre sizes** : 1.5 to 2.3

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : brass, ABS
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Front and rear bodies** : aluminum
 - **Axle material** : aluminum
- Sealed cartridge bearings
- **Freewheel** : TS-2 alloy

WHEEL WEIGHTS

Wheel weight
 Weight Rear 26": 940
 Weight Rear 27.5": 970
 Weight Rear 29": 1025