


REFERENZEN RÄDER

359916	COSMIC CARBONE 40 C ED11 WTS	359915	COSMIC CARBONE 40 C M11 WTS
--------	------------------------------	--------	-----------------------------



RIMS

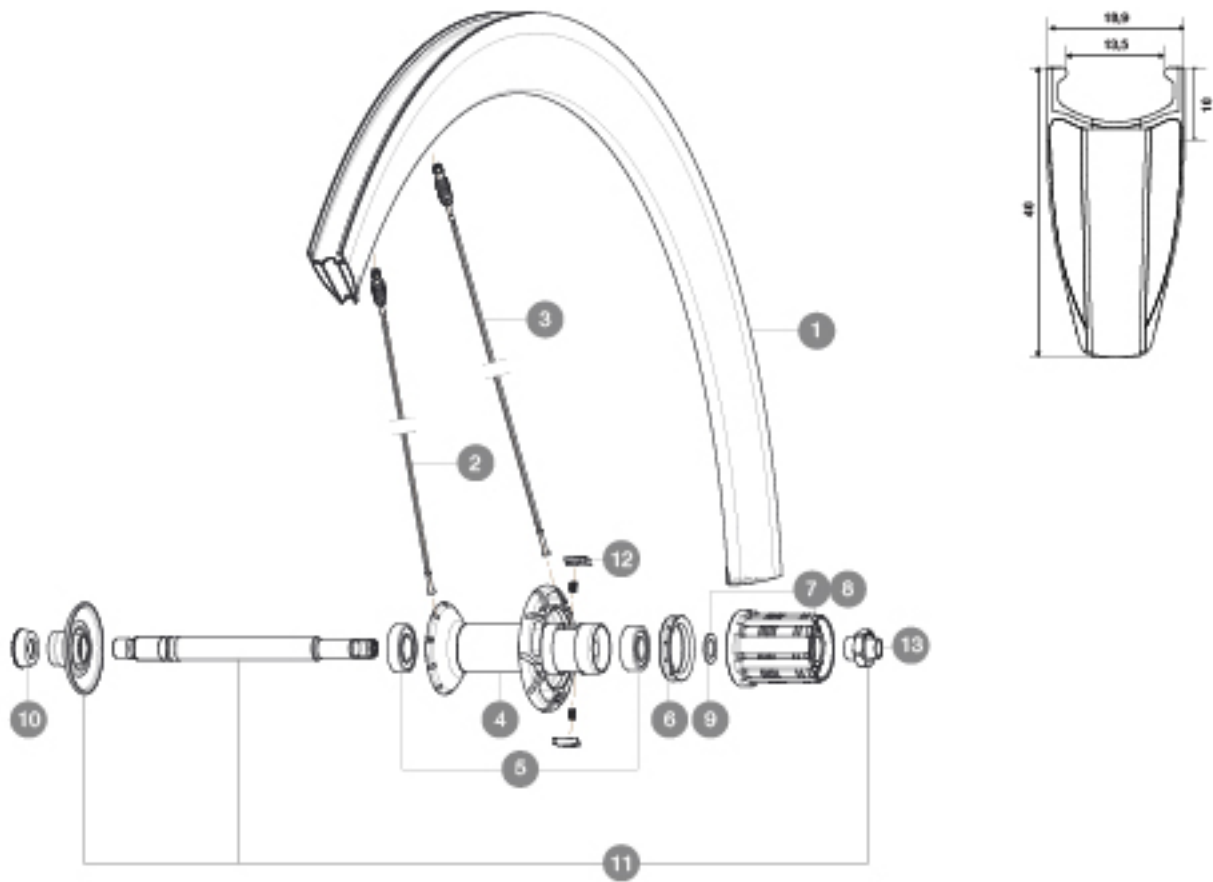

&NBSP;

1	32978213	REAR RIM CC 40 C
---	----------	------------------

SPOKES

2	32979001	KIT 10 AERO FT/ND S CC 40 C BLACK SPOKE 277mm - while stock l
2	V3664201	KIT 12 FRT/ND S STAINLESS SPOKE CC40 C 277mm
3	V3664101	KIT 12 DRIVE SIDE STAINLESS SPOKE CC40 C 275mm
3	32978901	KIT 10 AERO DS CC 40 C BLACK SPOKE 275mm - while stock last

HUB SHELLS

4	N/A	NABENKÖRPER
5	33000001	REAR HUB B9+6901 BEARINGS 2013
6	99500001	FTSL/FTSX FREEHUB BODY SEAL
7	30871101	FTS-L FREEWHEEL BODY HG11 2013 (8 or 9mm axle compatible)
8	30871201	FTS-L FREEWHEEL BODY ED11 2013 (8 or 9mm axle compatible)
9	30872801	SET OF 3 INTERNAL SILVER SPACERS 9mm FTS-L 2013
11	V2250301	KIT REAR AXLE AERO HUB CXR/CC40/CC SLS/CC SLE/COSMIC PRO CAR
12	M40578	FTSL PAWLS KIT (ROAD WHEELS)
13	V2373101	KIT NUT FOR ROAD ALLOY THROUGH AXLE 9mm

ADAPTERS

10	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013
----	----------	--

MAVIC

Cosmic Carbone 40 C

GELIEFERT MIT

Schnellspanner BR601	
----------------------	--

Specifications

FELGEN

- **Material** : 3K-Carbon mit Aluminium-verstärktem Felgenbett
- **Profilhöhe** : 40 mm, hinten mit asymmetrischen Felgenflanken
- **Felgenbohrungen** : eingegossene Fore-Einsätze
- **Bremsflanken** : Carbon mit TgMAX-Technologie
- **Ventilloch-Durchmesser** : 6,5 mm
- **Bereifung** : Drahtreifen
- **ETRTO-Größe** : 622 x 13c
- **Empfohlene Reifenbreite** : 19 bis 28 mm

SPEICHEN

- **Material** : Stahl
- **Speichen** : gerade, mit Aero-Profil, doppel-dickend
- **Speichennippel** : Fore (Aluminium), in die Speichen integriert
- **Speichenzahl** : je 20 vorne und hinten
- **Einspeichung** : radial (VR und HR links), 2fach gekreuzt (HR rechts)

RADNABE

- **Nabenkörper (VR und HR)** : Carbon-Mittelteil, Aluminium-Nabenflansche
- **Achs-Material (VR und HR)** : Aluminium QRM
- **Freilauf** : FTS-L (Stahl)

RADGEWICHTE

Radgewicht 875