



## REFERENCES WHEELS

F05301 Aksium Elite Ft



## RIMS

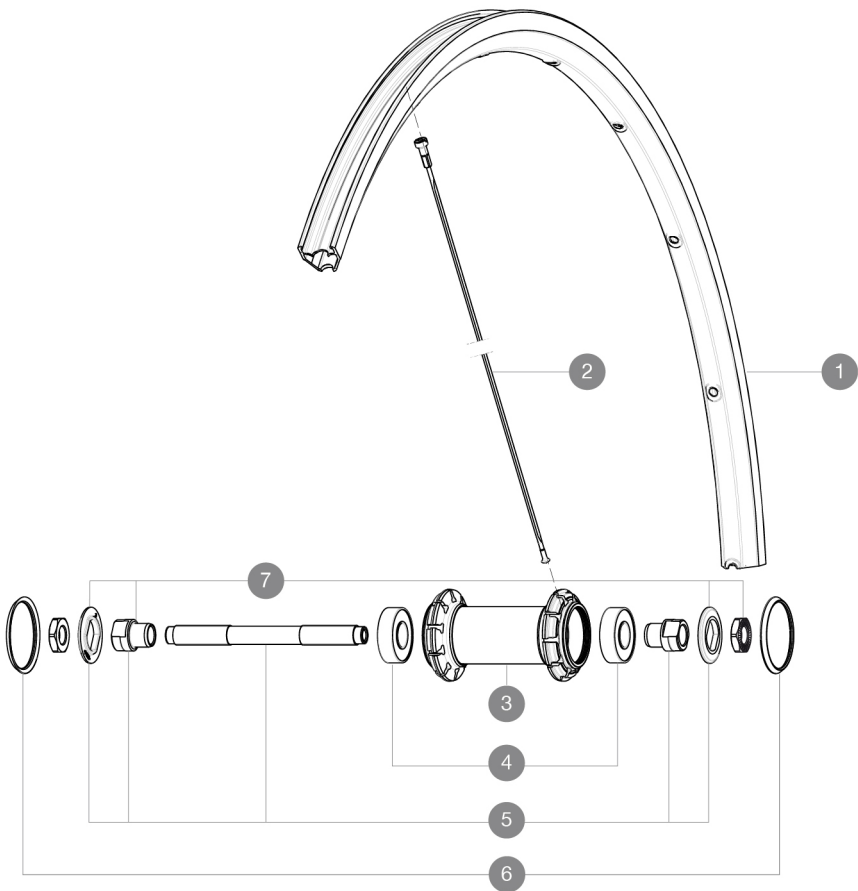

VALVE HOLE ? (MM): 6.5 :

|   |          |                                 |
|---|----------|---------------------------------|
| 1 | V2290715 | KIT FRONT/REAR RIM AKSIUM ELITE |
|---|----------|---------------------------------|

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | 10844901 | KIT 10 FT KSYRIUM EQ S/FT+NDS AKSIUM SPK 285mm - while stock |
| 2 | V4160101 | Kit 10 stainless spokes 285 Ft Ksyrium Equipe S/Ft & NDS Aks |
|   | 10845001 | KIT 10 DS AKSIUM STEEL AERO SPOKES 299mm                     |

## HUB SHELLS

|   |          |                                          |
|---|----------|------------------------------------------|
| 3 | N/A      | HUB BODY                                 |
| 4 | M40318   | KIT 2 HUB BEARINGS 6001                  |
| 5 | 99603701 | FRONT AXLE QRM ROAD 2008                 |
| 6 | N/A      | HUB BODY                                 |
| 7 | 99603801 | SHORT EXPENSIBLE BEARING SUPPORTS > 2008 |

## MAINTENANCE

|          |                            |
|----------|----------------------------|
| 12738501 | Road Innertube Presta 48mm |
|----------|----------------------------|

## TYRES

|          |                     |
|----------|---------------------|
| 35570423 | Aksion 014 White 23 |
|----------|---------------------|

# MAVIC Aksium Elite

## DELIVERED WITH

|                      |  |
|----------------------|--|
| BR101 quick releases |  |
| Rim tape             |  |
| User guide           |  |

## Specifications

### RIMS

- **Material** : S6000 Aluminum
- **Height** : 24 mm
- **Joint** : sleeved
- **Drilling** : traditional with H2 reinforcement
- **Brake track** : UB Control
- **Valve hole diameter** : 6.5 mm
- **Tyre** : clincher
- **ETRTO size** : 622x15C
- **Recommended tyre sizes** : 19 to 32 mm

### SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed
- **Nipples** : brass, ABS
- **Count** : 20 front and rear
- **Lacing** : radial front and rear non-drive side, crossed 2 rear drive side

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Axle material** : steel
- Sealed cartridge bearings
- **Freewheel** : FTS-L steel

### WHEEL WEIGHTS

Wheel weight 800