


ASTM CATEGORY 1 : road only  
Recommended weight limit : 120kg  
Recommended tire sizes: 25 to 32 mm  
Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi

## REFERENCES WHEELS

|        |                      |        |              |
|--------|----------------------|--------|--------------|
| R78701 | Aksium RS SMU Rr M11 | R99521 | Aksium RS Rr |
|--------|----------------------|--------|--------------|

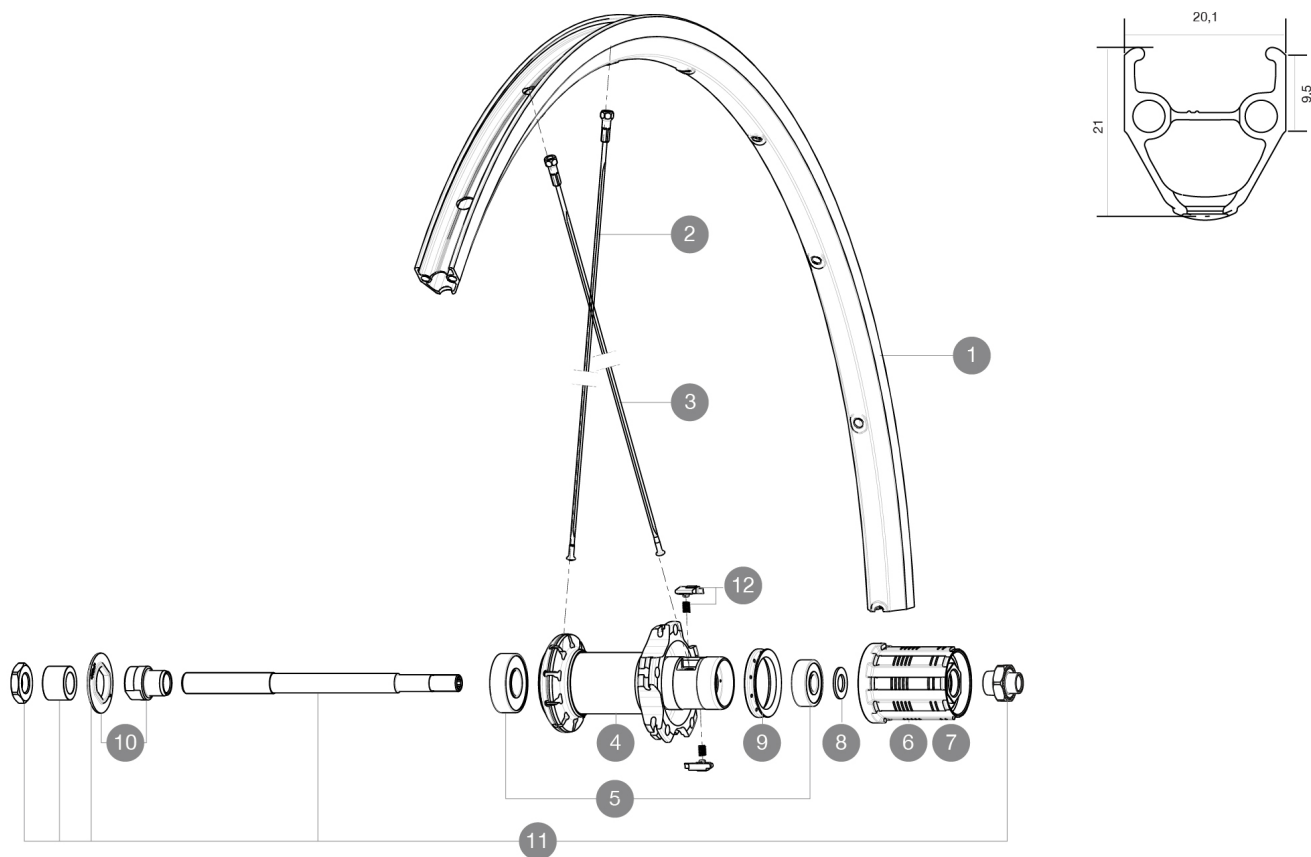

## RIMS



VALVE HOLE  $\bar{A}$  (MM): 6,5 :

|   |          |                           |
|---|----------|---------------------------|
| 1 | V2403015 | KIT FRONT/REAR RIM AKSIUM |
|---|----------|---------------------------|

## SPOKES

|   |          |                                               |
|---|----------|-----------------------------------------------|
| 2 | V2272701 | KIT 10 FT/NDS AKSIUM RND SPK 283mm (OEM only) |
| 3 | 10845001 | KIT 10 DS AKSIUM STEEL AERO SPOKES 299mm      |

## HUB SHELLS

|    |          |                                               |
|----|----------|-----------------------------------------------|
| 5  | M40660   | REAR HUB 608+6001 BEARINGS                    |
| 6  | 30871101 | FTS-L ROAD FREEWHEEL BODY HG11 8/9 compatible |
| 7  | 30871201 | FTS-L ROAD FREEWHEEL BODY ED11 8/9 compatible |
| 8  | M40067   | INTERNAL FREEWHEEL SPACER FTSL/FTSX           |
| 9  | 99500001 | FTSL/FTSX FREEHUB BODY SEAL                   |
| 10 | 99603801 | SHORT EXPENSIBLE BEARING SUPPORTS > 2008      |
| 11 | 99603901 | REAR AXLE QRM ROAD 2008                       |
| 12 | M40578   | FTSL PAWLS KIT (ROAD WHEELS)                  |

## DELIVERED WITH

|                                                                               |                                                                                   |
|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| BR101 quick releases<br>(M40350 firt, M40351 rear road, M40352 rear MTB)<br>1 |  |
| BR101 quick releases<br>(M40350 firt, M40351 rear road, M40352 rear MTB)<br>1 |  |
| Rim tape                                                                      |                                                                                   |
| Rim tape                                                                      |                                                                                   |
| User guide                                                                    |                                                                                   |
| User guide                                                                    |                                                                                   |

## COMPATIBILITY

|                                                                              |  |
|------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Front axle: Quick Release only                                               |  |
| Front axle: Quick Release only                                               |  |
| Rear axle: Quick Release only                                                |  |
| Rear axle: Quick Release only                                                |  |

## Specifications

### RIMS

- Material : S6000 Aluminum
- Material : S6000 Aluminum
- Height : 21 mm
- Height : 21 mm
- Joint : pinned
- Joint : pinned
- Drilling : traditional with H2 reinforcement
- Drilling : traditional with H2 reinforcement
- Brake track : UB Control
- Brake track : UB Control
- Valve hole diameter : 6.5 mm
- Valve hole diameter : 6.5 mm
- Tire : clincher
- Tire : clincher
- Internal width : 15mm
- Internal width : 15mm
- ETRTO size : 622x15C
- ETRTO size : 622x15C

### SPOKES

- Material : steel
- Material : steel
- Shape : straight pull, round
- Shape : straight pull, round
- Nipples : steel, ABS
- Nipples : brass, ABS
- Count : 20 front and rear
- Count : 20 front and rear
- Lacing : radial front and rear non-drive side, crossed 2 rear drive side
- Lacing : radial front and rear non-drive side, crossed 2 rear drive side

### WHEEL HUB

- Front and rear bodies : aluminum
- Front and rear bodies : aluminum
- Axle material : steel
- Axle material : steel
- Sealed cartridge bearings
- Sealed cartridge bearings
- Freewheel : FTS-L steel
- Freewheel : FTS-L steel

### VERSIONS

- Color : Black only
- Color : Black only

### WHEEL WEIGHTS

Wheel weight 1015