

ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included



Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")

REFERENCES WHEELS

F80321 Xa Pro 29 Ft

F80521 Xa Pro 29 Ft Lefty 60

F80331 Xa Pro 29 Ft Bst

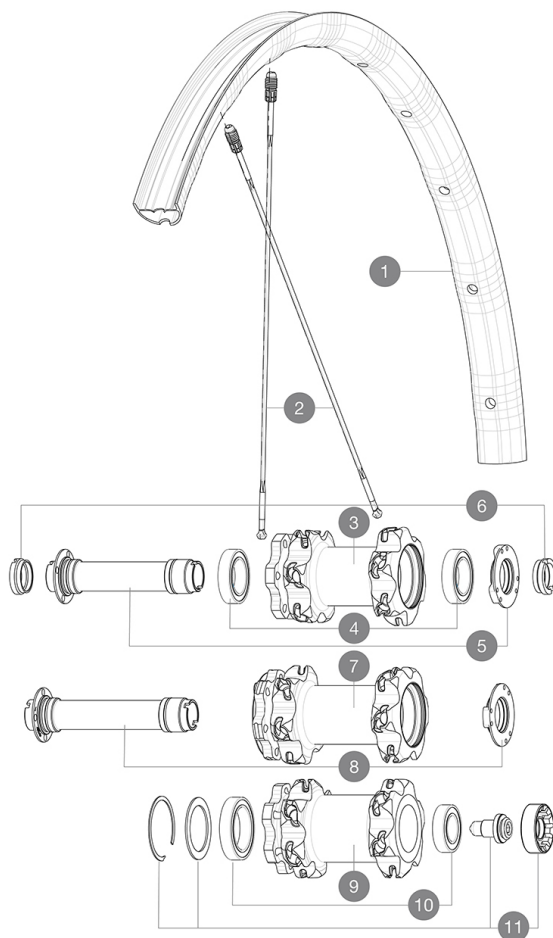

RIMS



&NBSP;:

1 V2318510 KIT FRONT RIM XA PRO 29"

SPOKES

2 V2384801 KIT 12 FT/NDS CROSSMAX PRO 29" AL SPK 293mm
2 V2385601 KIT 1 FT/RR XA PRO 29" BUTTED ALU SPOK 293mm - while stock

HUB SHELLS

3 N/A HUB BODY
4 99688501 BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
5 V2252301 KIT MY16 FRONT AXLE ROAD DISC 9/12/15 INT
7 N/A HUB BODY
8 V2370701 KIT FRONT QRM+ AXLE BOOST INTL 110mm
9 N/A HUB BODY
10 M40771 BEARING KIT FOR LEFTY 50 & 60 HUB
11 36709301 ASSEMBLY KIT FOR LEFTY SUPERMAX WHEELS

OPTIONS

V2650201 ADAPTER Front Torque Cap 15x31 MTB QRM +

ADAPTERS

6 B4104401 ADAPTER Ft 15mm QRM+
B4104301 ADAPTER Ft 9mm QR QRM+



XA Pro 29

DELIVERED WITH

UST valve and accessories (129 838 01)	
Tubeless rim tape	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Front axle: convertible from 15mm thru axle to Quick Release with optional adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

Specifications

RIMS

- **Material** : Mxtral
- **Joint** : SUP
- **Drilling** : traditional
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 25 mm
- **ETRTO size 27.5"** : 584x25TSS
- **ETRTO size 29"** : 622x25TSS

Use with Mavic Tubeless Tape

SPOKES

- **Material** : Zicral
- **Count** : 24 front and rear
- **Lacing** : front crossed 2, rear Isopulse
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Front and rear bodies** : aluminum
 - **Axle material** : aluminum
- Sealed cartridge bearings (QRM)
- **Freewheel** : ITS-4 alloy

VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

WHEEL WEIGHTS