



## ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")

## REFERENCES WHEELS

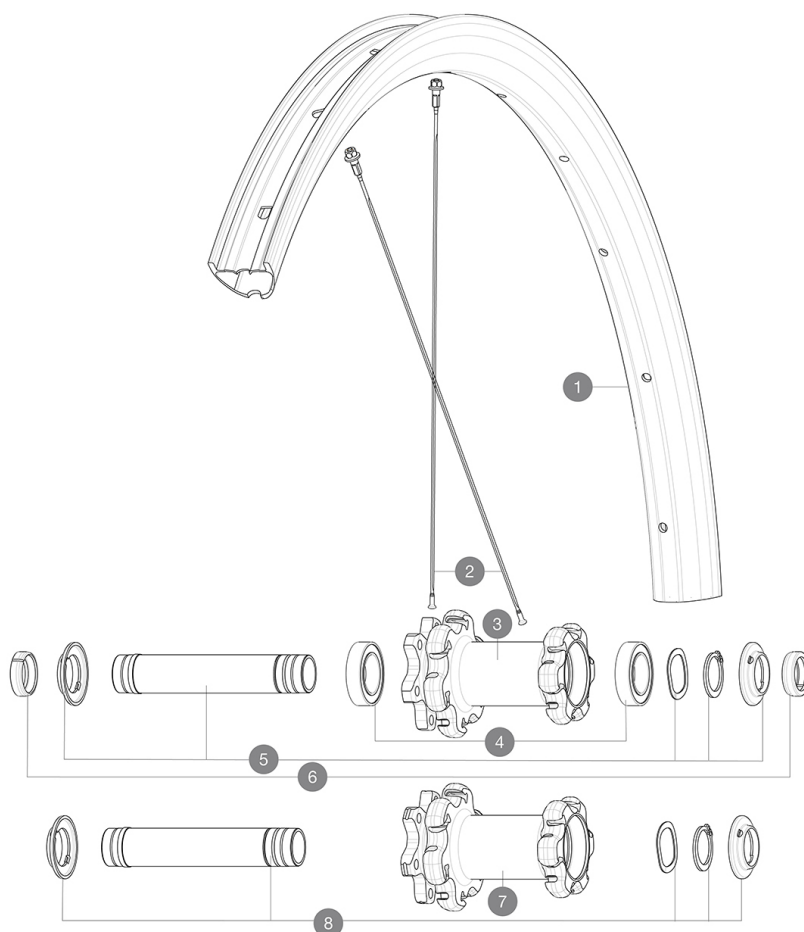

## RIMS



&NBSP;:

|   |          |                                        |
|---|----------|----------------------------------------|
| 1 | V3040110 | KIT FRONT RIM XA PRO CARBON 27,5"      |
|   | V3750101 | 35mm UST Green Tape for 30mm wide rims |

## SPOKES

|   |          |                                                            |
|---|----------|------------------------------------------------------------|
| 2 | V2387701 | KIT 12 FRT/REAR XA PRO CARBON 27,5" EXTRA FLAT SPOKE 269mm |
|---|----------|------------------------------------------------------------|

## HUB SHELLS

|   |          |                                            |
|---|----------|--------------------------------------------|
| 3 | N/A      | HUB BODY                                   |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP |
| 5 | V2372301 | KIT 100mm AXLE QRM AUTO MTB > 2019         |
| 7 | N/A      | HUB BODY                                   |
| 8 | V2372401 | KIT 110mm AXLE QRM AUTO MTB > 2019         |

## OPTIONS

|          |                                                       |
|----------|-------------------------------------------------------|
| V2374401 | TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB |
|----------|-------------------------------------------------------|

## ADAPTERS

|   |          |                                      |
|---|----------|--------------------------------------|
| 6 | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |
|   | 99694101 | ADAPTER Ft 15 to 9mm QR              |



# XA Pro Carbon

### DELIVERED WITH

|                                                 |                                                                                   |
|-------------------------------------------------|-----------------------------------------------------------------------------------|
| UST valve and accessories<br>(129 838 01)       |  |
| Tubeless rim tape                               |                                                                                   |
| Multifunction adjustment wrench<br>(325 423 01) |                                                                                   |
| User guide                                      |                                                                                   |

### COMPATIBILITY

|                                                                                                             |  |
|-------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                                               |  |
| Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel) |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)      |  |
| Freewheel: Shimano Micro Spline                                                                             |  |

### Specifications

#### RIMS

- **Material** : 100% Unidirectional carbon fiber
- **Drilling** : traditional
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 26 mm
- **ETRTO size 27.5"** : 584x26TSS
- **ETRTO size 29"** : 622x26TSS

Hookless profile  
Use with Mavic Tubeless Tape

#### SPOKES

- **Material** : steel
- **Shape** : straight pull, flat, double butted
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

#### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Auto adjust sealed cartridge bearings (QRم Auto), front and rear
- **Freewheel** : Instant Drive 360

#### VERSIONS

- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- **Freewheel** : Shimano/Sram or XD

#### WHEEL WEIGHTS

Weight Front 27.5": 672  
Weight Front 29": 707