

#### ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 150kg, bike included

Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")


#### REFERENCES WHEELS

R28591 E-Xa30 Elite 29 Rr

R28621 E-XA30 Elite 29 Rr Boost

R28611 E-Xa30 Elite 29 Rr XD

R28631 E-Xa30 Elite 29 Rr Bst XD Bk

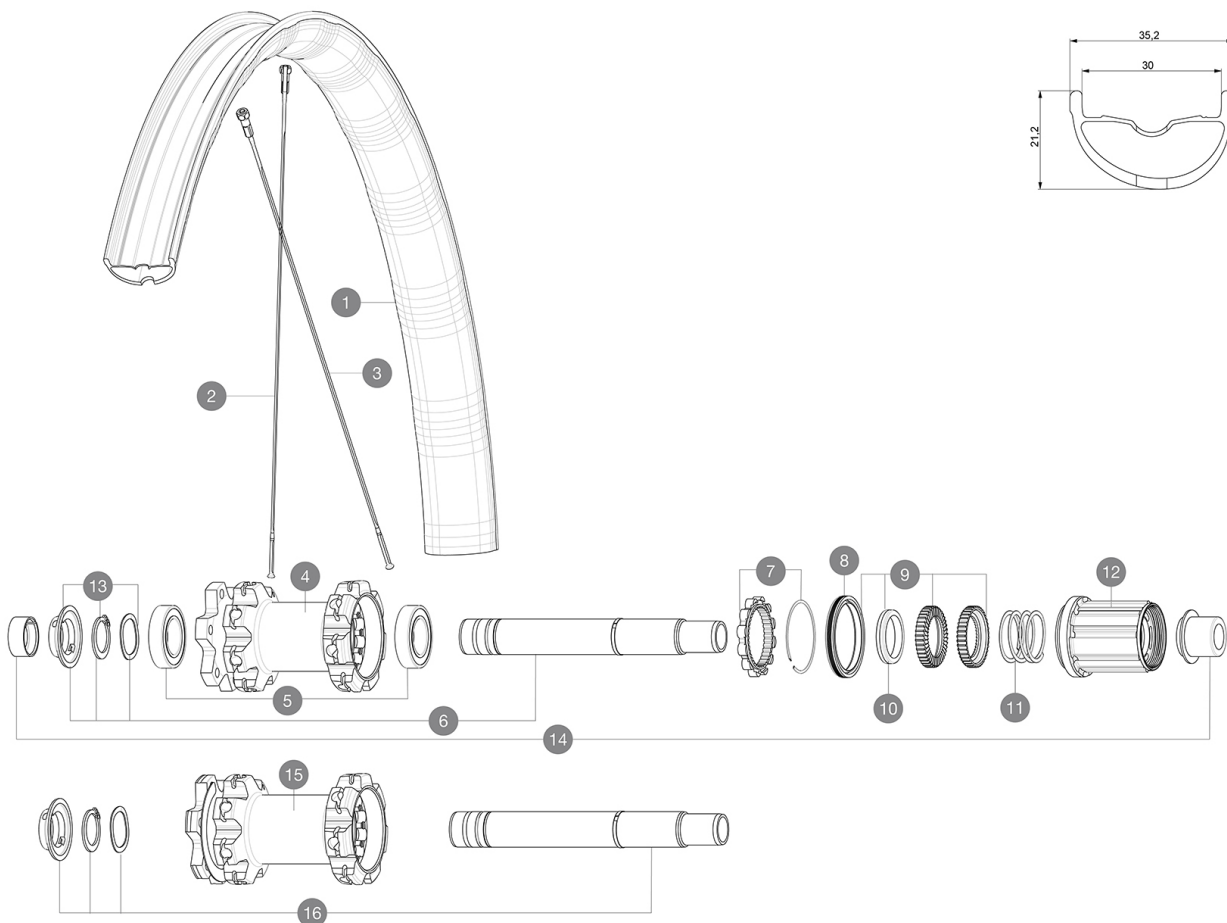

#### RIMS



&amp;NBSP;:

|   |          |                                        |
|---|----------|----------------------------------------|
| 1 | V3763513 | KIT REAR RIM E-XA ELITE 19 29"         |
|   | V3750101 | 35mm UST Green Tape for 30mm wide rims |

#### SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V3821101 | KIT 14 NDS DEEMAX ELITE/E-XA ELITE 19 29 FLAT BUTTED SPOKE 3 |
| 3 | V3820801 | KIT 14 DS DEEMAX ELITE/E-XA ELITE 19 29" FLAT BUTTED SPOKE   |

#### HUB SHELLS

|    |          |                                                            |
|----|----------|------------------------------------------------------------|
| 4  | N/A      | HUB BODY                                                   |
| 5  | M40076   | HUB BEARINGS 17x30x7 6903 x 2                              |
| 6  | V2372101 | KIT ID360 135/142 D6T AXLE WITH CLIP                       |
| 7  | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017                    |
| 8  | V2251601 | KIT ID360 SEAL + GREASE                                    |
| 9  | V2375201 | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 10 | V2375401 | KIT ID360 MTB 24T 3 NOISE REDUCING PADS                    |
| 11 | V2372901 | KIT 3 ID360 MTB SPRINGS                                    |
| 12 | V3790101 | HG9 Steel MTB Freewheel Body ID360                         |
| 13 | V2373001 | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing      |
| 15 | N/A      | HUB BODY                                                   |
| 16 | V2372201 | KIT ID360 148 D6T AXLE WITH CLIP                           |

#### ADAPTERS

|    |          |                              |
|----|----------|------------------------------|
| 14 | V2510701 | ID360V2RrAxleAdapt12x142/148 |
|    | V2510801 | ID360 V2 RrAxleAdapt9x135    |

MAVIC

E-XA30 Elite 29

DELIVERED WITH

|                                           |                                                                                   |
|-------------------------------------------|-----------------------------------------------------------------------------------|
| Computer magnet<br>(105 416 01)           |                                                                                   |
| UST valve and accessories<br>(129 838 01) |  |
| Specific disc bolts<br>(308 719 01)       |                                                                                   |
| Tubeless rim tape                         |                                                                                   |

COMPATIBILITY

|                                                                        |  |
|------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                          |  |
| Front axle: 15mm, convertible to 20mm thru axle with included adapters |  |
| Freewheel: Shimano Micro Spline                                        |  |

Specifications

RIMS

- **Material** : Mxtral
  - **Joint** : SUP
  - **Drilling** : traditional
  - **Weight reduction** : ISM 4D
- E-Bike specific rim profile
- **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 30 mm
- Use with Mavic Tubeless Tape
- **ETRTO size 27.5"** : 584x30TSS
  - **ETRTO size 29"** : 622x30TSS

SPOKES

- **Material** : steel
- **Shape** : straight pull, flat, double butted
- **Count** : 28 front and rear
- **Lacing** : front and rear crossed 3

WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Auto adjust sealed cartridge bearings (QRM Auto), front and rear
- **Freewheel** : Instant Drive 360 steel

VERSIONS

- **Disc standard** : 6 Bolts only
- **Hub width** : Boost only (front 110, rear 148)
- **Freewheel** : Shimano/Sram or XD

WHEEL WEIGHTS