# MAVIC Cosmic SLR 45 Disc

2021 REAR

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  $\,$ 

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesnn't


exceed 120kg, bike included

Recommended tyre sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tyre. If they differ, use the lowest of the  $2\,$ 

#### **REFERENCES WHEELS**

R36711 Cosmic SLR 45 DCL Rr R38961 Cosmic SLR 45 DCL Rr XDR

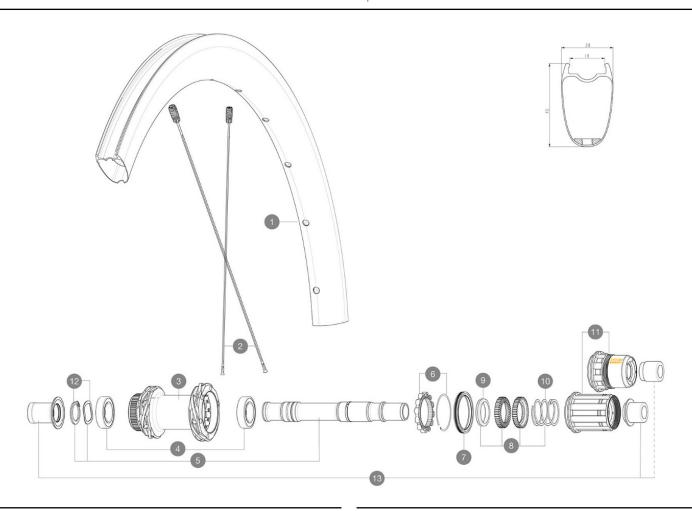

## **RIMS**



## :

1	V4095015	Kit Front/Rear rim Cosmic SLR 45 Disc MY22
1	V4093615	Kit Front/Rear rim Cosmic SLR 45 Disc - while stock last

#### **SPOKES**

2 V4163701 Kit 12 Front/Rear Cosmic SLR 45 Disc aero stainless spoke 27	
---	--

## **HUB SHELLS**

3	N/A	HUB BODY	
3	N/A	HUB BODY	
4	M40076	HUB BEARINGS 17x30x7 6903 x 2	
5	V00046431	KIT AXE ID360 142LIGHT CL+CIR	
6	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017	
7	V00063631	Kit ID360 seal version 2 (larger)	
8	V2251701	KIT ID360 2 RATCHETS + SPRING + GREASE	
9	V2500501	KIT ID360 3 PADS NOISE REDUCING	
10	V2251801	KIT 3 ID360 ROAD SPRINGS	
11	V3430101	HG11 Freewheel Body ID360	
11	V2580101	FREEHUB BODY XD Road ID360	
12	V2373001	KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing	

# **OPTIONS**

V2373401 KIT ID360 135/142 DCL L1 AXLE WITH CLIP

## **ADAPTERS**

13	V3811001	KIT ROAD ID360 RR CL ENDCAP (12MM)
	V2510801	ID360 V2 RrAxleAdapt9x135
	V2510901	ID360 EVO RrAxleAdpt12x135/150

# MAVIC Cosmic SLR 45 Disc

2021 REAR

#### **DELIVERED WITH**

UST valve and accessories (129 838 01)	
User guide	

## **COMPATIBILITY**

Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle: 12x100 thru axle, easily convertible to quick release with optional adapters. Not compatible with 15mm through axles.	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

## **Specifications**

#### RIMS

- Material: 100% carbon fiber - Height: 45 mm Disc brake specific profile • Tire: UST Tubeless and tubetype • Internal width: 19 mm ■ ETRTO size: 622x19TC Road Fore Carbon

UST **SPOKES** 

## - Material : steel

• Shape: straight pull, elliptical aero, double butted (patented)

• Nipples : Fore integrated aluminum • Count : 24 front and rear

- Lacing: front and rear crossed 2, contactless

#### WHEEL HUB

 ${\color{red} \bullet} \, \text{Front and rear bodies}: \text{ aluminum}$ - Axle material: aluminum

• Front: Quick release and 12x100 through axle

compatible

• Rear: Quick Release, 12x142 and 12x135

compatible Infinity Hub Instant Drive 360 QRM Auto

#### **VERSIONS**

- Disc standard: Center Lock (R) only • Freewheel: Shimano/Sram or XD-Road

#### WHEEL WEIGHTS

800